


#7500 MAINGUARD BLOW-OFF

4" ABOVE GROUND BLOW-OFF

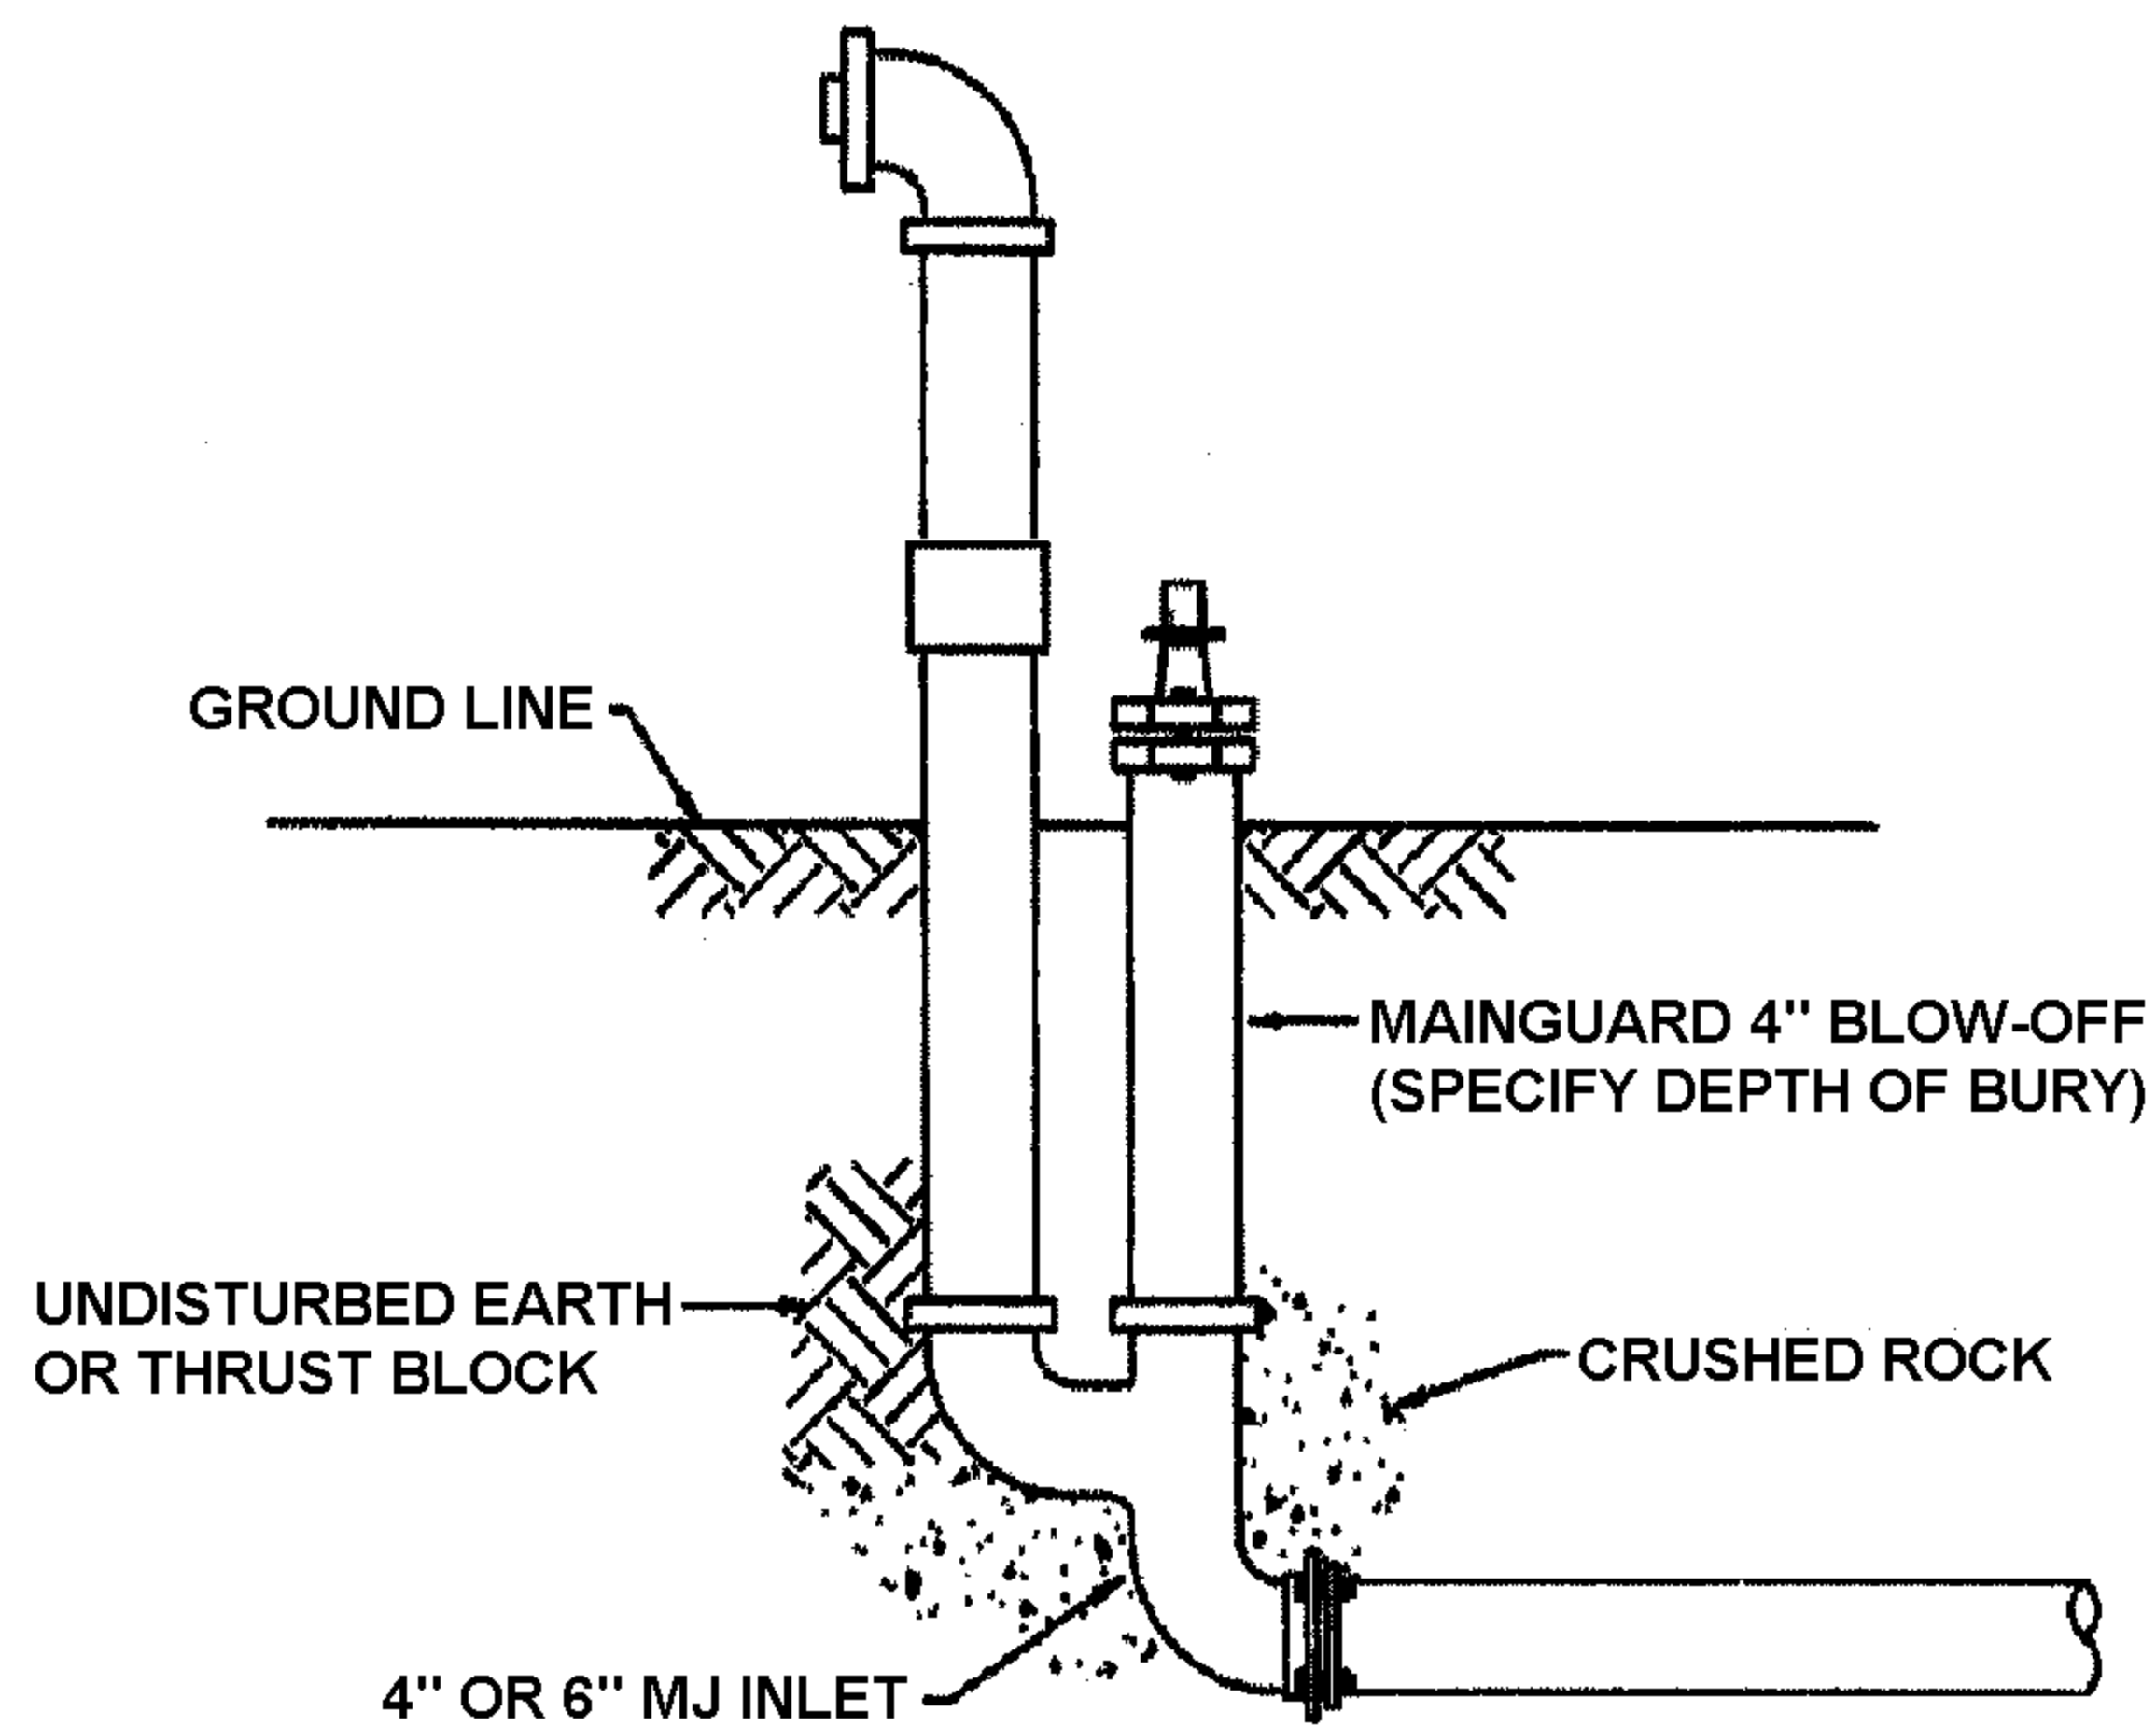

BLOW-OFFS SHALL BE NON-FREEZING, SELF DRAINING TYPE WITH AN OVERALL LENGTH OF ___', BLOW-OFFS WILL BE FURNISHED WITH A 4" OR 6" MJ INLET, A NON-TURNING OPERATING ROD AND SHALL OPEN TO THE LEFT. ALL OF THE WORKING PARTS SHALL BE BRASS TO BRASS DESIGN, AND BE SERVICEABLE FROM ABOVE GROUND WITH NO DIGGING. UNITS SHALL OPERATE WITH A STANDARD 2" GATE VALVE WRENCH. WHEN OPEN, VALVE SHALL BE 100 % UNOBSRUCTED AND DRAIN HOLE SHALL BE COVERED. THE OUTLET SHALL BE 4" FIP WITH PLUG AND EXTENDED A MINIMUM OF 12" ABOVE THE GROUND, AS MANUFACTURED BY KUPFERLE FOUNDRY CO., ST. LOUIS, MO. MODEL #7500 OR APPROVED EQUAL.

ECLIPSE
TRADEMARK
FOUNDRY
Since 1857



KUPFERLE FOUNDRY COMPANY

813 HEMPSTEAD STREET, ST. LOUIS, MO 63102

(314) 231-8738 FAX 231-2820 (800) 231-3990